

PATENT APPLICATION
IN THE UNITED STATES PATENT AND TRADEMARK OFFICE


In re application of

Claudio COLOMBO

Appln. No.: 10/685,430

Confirmation No.: 5829

Filed: October 16, 2003



Docket No: Q77861

Group Art Unit: 2661

Examiner: Not Assigned

For: PACKET SWITCHING FOR PACKET DATA TRANSMISSION SYSTEMS IN A
MULTI-CHANNEL RADIO ARRANGEMENT

SUBMISSION OF PRIORITY DOCUMENT

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

Submitted herewith is a certified copy of the priority document on which a claim to
priority was made under 35 U.S.C. § 119. The Examiner is respectfully requested to
acknowledge receipt of said priority document.

Respectfully submitted,

David J. Cushing
Registration No. 28,703

SUGHRUE MION, PLLC
Telephone: (202) 293-7060
Facsimile: (202) 293-7860

WASHINGTON OFFICE

23373

CUSTOMER NUMBER

Enclosures: Europe 02292555.6

Date: February 13, 2004





**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02292555.6

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 02292555.6
Demande no:

Anmeldetag:
Date of filing: 16.10.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

ALCATEL
54, rue la Boétie
75008 Paris
FRANCE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Packet switching for packet data transmission systems in a multi-channel radio arrangement

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H04L12/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

The present invention relates to the field of wireless transmissions, both of point-to-point and point-to-multipoint type. More in particular, the present invention relates to multi-channel wireless transmission systems transmitting packet data signals. Still more in particular, the present invention relates to a mechanism operating a novel packet switching.

In the field of radio systems, multi-channel systems are known and widely used. In multi-channel protected arrangements a number n of working channels and one (or more) spare channel are provided. Typical configurations are $n+1$ (n working channels and one protecting channel) or $n+2$ (n working channels and two protecting channels).

Many of the above systems are presently used also for transmitting packet data signals, namely signals arranged in the form of data packets. Typical data packet signals comprise Ethernet or fast Ethernet signals.

At present, the transport of packet data signals in a multi-channel radio system is performed by means of SDH/SONET Virtual Concatenation. For instance, by using a $n+1$ radio channel configuration (n working channels + one spare channel for protection), the transport of data frames is performed in the following manner:

- the bytes of one frame are distributed among all the SDH/SONET Virtual Containers and transmitted through the n working channels;
- a dedicated radio channel is reserved for the protected configuration of the system against atmospheric phenomena of attenuation, reflections or radio channel noise;
- due to the fact that the SDH/SONET Virtual Containers can follow different paths, at the ending point the Virtual Containers should be re-aligned;
- the bytes of the data frames are extracted from the re-aligned Virtual Containers and the frame is re-assembled.

In case of degradation or failure of one working channel, the packet data traffic needs to be switched on the spare channel in order to avoid the loss of the whole traffic distributed on the interested Virtual Container, resulting in that

the whole traffic becomes unavailable (the bytes of one frame are distributed among all the virtual containers.

5 The above procedure has several disadvantages. The first disadvantage is that the system needs further hardware to work. For sure, it needs a switching equipment to provide the protection of the working channels (TX/RX distributors, a controller, ...). Furthermore, proper switching criteria should be detected.

10 A further disadvantage lies in that the available bandwidth is reduced, due to the need to reserve (at least) one spare channel dedicated to the switching performance.

A further disadvantage is that, in case of sudden break of one channel (namely a non predictable failure), all the messages whose bytes transit in the fail-affected Virtual Containers will be lost.

15 In view of the above disadvantages, the main object of the present invention is overcoming them and providing a new method and apparatus performing a switching in a packet data transmission system in a multi-channel radio arrangement.

20 The problem to solve is how to transport packet data streams (for instance Ethernet frames) by means of two or more SDH/SONET Virtual Containers in a multi-channel radio arrangement.

25 This means that a dedicated link of two or more SDH/SONET Virtual Containers should be provided for the transport of Ethernet frames in a wireless point-to-point connection. The task is to perform this type of transport in the best way, with an optimisation of the required microwave bandwidth and using a protection scheme without dedicated spare channels or any other hardware equipment.

30 The above and further objects are obtained by a method according to claim 1 and an apparatus according to claim 5. Further advantageous features of the present invention are set forth in the respective dependent claims. All the claims are considered as an integral portion of the present description.

According to the present invention, a packet switching is implemented.

The basic idea is to assign the transport of a data packet to a single Virtual Container. This means that different Virtual Containers concurrently transport different frames. With the Virtual Concatenation, all the Virtual Containers concurrently transport the same frame.

5 The present invention will become clear from the following detailed description, given by way of non limiting example, to be read with reference to the attached drawings, wherein:

- Fig. 1 diagrammatically shows how packet messages are sent using virtual concatenation, according to the state of the art;
- 10 - Fig. 2 shows the arrangement of Fig. 1 in case of a sudden break of a channel;
- Fig. 3 diagrammatically shows how packet messages are sent using the packet switching mechanism according to the present invention;
- 15 - Fig. 4 shows the arrangement of Fig. 3 in case of a sudden break of a channel;
- Fig. 5 shows in greater detail how a multi-channel radio system for transmitting packet frame signals could be implemented according to the state of the art;
- 20 - Fig. 6 shows the multi-channel switching arrangement, both TX and RX sides, that is used in the system of Fig. 5;
- Fig. 7 shows the multi-channel packet-data switching arrangement according to the present invention; and
- Fig. 8 shows the arrangement of Fig. 7 in case of failure.

25 Reference should be made first to Fig. 1 diagrammatically showing how packet messages are transmitted using virtual concatenation, according to the state of the art. At the transmission side there are a number of packets (A, B, C, ..., n) to be transmitted. According to the virtual concatenation, each one of these packets is distributed among the available working resources/channels.

30 Thus, in other words, if, for instance, the configuration is a "3 + 1" (three working channels and one spare channel), packet A is divided (for instance in a

bit-by-bit wise) into three portions A1, A2, A3, and each portion is transported through one of the three different working channels (VC-X#1, VC-X#2, VC-X#3). In a free-of-failure condition, the spare channel is not used and it is in a stand-by status. In this and in the following figures, the working channels are shown as gray tubes while the spare/protection channels are white tubes.

The Virtual Concatenation foresees that a transported message is divided between the different Path composing the Pipe. The original message is inserted inside the available VCs assigning a single byte for every available VC until the sending bytes are terminated. In receiving side, the receiver must re-align the VCs before the original message is extracted.

The main characteristic of this technique are:

- all the bandwidth is used to transport every single message;
- if a VC payload is lost, the whole message is lost;
- it is necessary to provide the VCs re-alignment before extracting the message.

When the transmission quality in a channel degrades and a fail is expected, the spare channel is switched on. Such a switching mechanism is hitless and no packets is lost.

Also in case an inspected break of the working channels (see Fig. 2) occurs, the spare channel is activated replacing the failed working channel but all the packets partially transported by the failed channel are not usable because they are not complete. Furthermore, as it will become clear from the following description of other prior-art figures, additional hardware should be provided but such an additional hardware remains unemployed most of the time. In addition, it is clear that in case of failure also in the spare channel (in addition to a working channel), all the radio link becomes not usable.

Fig. 5 shows in greater detail how a multi-channel radio system for transmitting packet frame signals could be implemented according to the state of the art. A flow of packet frames to be transmitted enter a first network element, say NE#1. The packet frames are sent first to a queue of incoming frames block 12 storing queues of packets, then to a dispatcher 14 and finally to

a TX switching equipment TXSW.

In the reception side, the packet frames are received by a corresponding RX switching equipment RXSW providing its output to a frame re-ordering block 16. The frame re-ordering block 16 in its turn, feeds a queue of outgoing frames block 18 whose output are the original packet frame signals.

The TX and RX switching equipments TXSW, RXSW are shown in greater detail in Fig. 6. The TX switching equipment TXSW comprises $n + 1$ (thus, in the present example, $3 + 1 = 4$) radio TX apparatuses TX1, TX2, TX3, TX4. The TX switching equipment further comprises a TX distributor 20 and n hybrid components 221, 222, 223. Both the TX distributor 20 and hybrid components 221-223 are fed by the dispatcher of frames block 14 and feed the respective TX apparatus TX1 - TX4. The hybrid components 221-223 bridge the received data packets to the TX distributor 20 so that, in case of failure, the TX apparatus TX4 of the spare channel #4 will be able to replace the TX apparatus of the failed channel.

The RX switching equipment RXSW, correspondingly, comprises $n + 1$ (thus, in the present example, $3 + 1 = 4$) radio RX apparatuses RX1, RX2, RX3, RX4. The RX switching equipment further comprises a RX distributor 24. The output of the radio RX apparatuses RX1-RX3 feed a hitless switch 26 connected with the RX distributor 24.

It is known that on radio-relay links, fading initially causes a deterioration in transmission quality finally leading to an interruption. Thus, if a high-speed quality monitor apparatus were used to switch, without a slip in bit count, to a better protection channel before the signal is interrupted, it would be possible to avoid any interruptions.

In order to operate as a countermeasure against multipath fading, the switching system must operate in a truly "error free hitless" mode, preserving the "bit count integrity" of the output bit stream, and the overall switching time must be short enough to counteract fast fading events.

In order to operate "error free" switching and to maintain the "bit count integrity" even in the case of severe multipath fading, two fundamental requirements must be fulfilled:

- the switching system must compensate for the different and time-varying transmission delays on the working channel and on the protection channel: a fast delay adjustment procedure is required before switching.

5 - the overall switching sequence must be completed before the "outage BER" threshold is reached.

With reference to the functional block diagram of $n+1$ hitless switch shown in Figures 5 and 6, when fading occurs in the working channel and a quality threshold is exceeded, the TX distributor 20 bridges the protection channel to the failure affected channel.

10 Thus, the same signal is then present at both inputs of hitless switch in the degraded working channel and an alignment procedure can start.

After the two signals have been aligned, it is possible to switch (select) from the working to the protection channel in a completely error free mode. As restoral from the protection channel to the working channel is effected in the same way, it is also hitless.

15

In case of multi-line switching, one or p ($p>1$) protection radio channels are prepared for n working channels. When one of the n working channels is interrupted, the signal in the interrupted channel will immediately be recovered by one of the protection channels over m radio hops.

20 The basic idea of the present invention is shown in Figures 3 and 4. It fundamentally consists in assigning the transport of a data packet frame to a single Virtual Container VC.

This means that different Virtual Containers concurrently transport different frames. On the contrary, through the Virtual Concatenation, all the Virtual Containers concurrently transport the same frame, as said above.

25

Independent basic pipelines make up the pipe and every pipeline transports a subset of packet data frames assigned to the complete pipe. Through the Virtual Concatenation, every frame is transported by the complete pipe. This type of concatenation has been named "Packet Concatenation".

30 The packet concatenation does not provide any information fragmentation, but sends a single different message over a single available

Path for a specific available Pipe.

The main characteristics of this technique are:

- a single Path is used to transport a single message;
- in case of a sudden break of a channel (see Fig. 4), the other
 5 messages sent over the other Paths of the same Pipe are considered "valid",
 because the data transported by every Path are un-correlated from those
 transported by the other Path of the same Pipe. Obviously, in case of a
 degradation of a channel, a full hitless switch is performed and no packets are
 lost.
- 10 □ it is necessary a re-ordering of the messages transported by
 different Path, to restore the original sequence.

Fig. 7 depicts a link from a first Network Element, NE#0, to a second
 Network Element, NE#1, according to the present invention. The link is made
 up of four Virtual Containers VC-X#1 - VC-X#4 in a 4+0 multi-channel radio
 15 configuration (all the available microwave bandwidth is reserved for data
 transmission, without any spare channel).

The incoming packet data frames (for instance a sequence of frames
 labelled as A, B, C, D, E, etc..) are stored into a queue buffer 40l providing them
 to a dispatcher 42l. The dispatcher 42l provides its output to four (one for each
 20 channel) path source functional blocks 421l, 422l, 423l, 424l that manage the
 insertion of a packet data frame into a Virtual Container. Analogously, at the
 receiving side (NE#1), there are four (one for each channel) path sink functional
 blocks 441r, 442r, 443r, 444r that manage the extraction of a packet data frame
 from a Virtual Container, a block 50 for reordering the received frames and a
 25 queue buffer 52. The "l" suffix of blocks of Network Element #0 stands for "left";
 the "r" suffix of blocks of Network Element #1 stands for "right".

Also NE#1 is provided with a queue buffer 40r, a dispatcher 42r and four
 path source functional blocks 461r, 462r, 463r, 464r. In NE#0 there are four
 path sink functional blocks 481l, 482l, 483l, 484l, a block 54 for reordering the
 30 received frames and a queue buffer 56.

The transport of these frames is performed according to the following

steps:

1. The dispatcher 421 assigns a frame to every Virtual Container: for instance frame A is assigned to VC-X#1lr, frame B to VC-X#2lr, frame C to VC-X#3lr and frame D to VC-X#4lr. A sequence label/number is attached to every
5 frame in this stage.

2. Every VC performs the transport of the assigned packet data frame.

3. Due to the fact that different Virtual Containers along different paths concurrently transport different frames, at the ending point the received
10 frames must be re-ordered according to their sequence label/number. Let consider that the sequence of frames received at the ending point is B, D, A and C. After the reception of frame A, both frames A and B can be stored in the outgoing queue to be transmitted. After the reception of frame C also frames C and D can be stored in the same queue to be transmitted.

4. The next frame E of the queue of incoming frames is assigned to
15 one of the four Virtual Containers VC-X#1; e.g. it could be assigned to the first VC that has completed the transport of currently assigned frame. The same for the following incoming packet data frames.

Steps from 2 to 4 are repeated.

20 In the previous example the criterion of assignment of a frame to a VC is very simple: a frame is assigned to the first available VC.

According to the present invention (see Fig. 8), in case of failure of a Virtual Container (e.g. VC #3) due to a degradation or failure of the radio channel #3, it can be removed from the pipe and the remaining Virtual
25 Containers (i.e. VC #1, VC#2 and VC#4) perform the Packet Concatenation.

Advantageously, a failure on a working channel does not lead to the complete loss of the traffic but just to a bandwidth reduction.

The description of how the removal of a failed Virtual Container is performed will be provided now with reference to Figures 7 and 8.

30 Figures 7 and 8, as said above, depict the two functional blocks that manage the insertion and extraction of a packet data frame into a Virtual

Container: Path source (421l-424l; 461r-464r) and Path sink (441r-444r; 481l-484l). Let consider as an example a failure occurred on the working channel #3 involving the transmission of VC-X #3lr (from NE #0 to NE #1).

5 Path sink 443r detects the failure and provides the related information to Path source 463r through a proper communication channel CC1; the transmission of packet data frames on VC-X #3rl is disabled and just status information are forwarded to Path sink 483l by means of the VC-X #3rl itself.

10 The failure information are received by Path sink 483l and forwarded to Path source 423l through a proper communication channel CC2. Path source 423l, in its turn, disables the transmission of packet data frames. At this stage, the VC-X #3 is completely disabled in both directions and this condition will remain until the disappearance of failure detection.

15 In the previous example, the occupied bandwidth dimension is dynamically modified in order to recover from a failure. The dynamic modification of the spectral occupation can be performed also in absence of failure just to increase/decrease the link capability; this feature is performed by the same communication channels CC1, CC2 already described and without any loss of packet data frames.

20 As already described, the present invention provides the following main advantages:

- The system does not require a dedicated spare channel to protect a single working channel transporting a VC against degradation or failure of the radio channel. This results in an efficient bandwidth utilisation for data traffic, because all the assigned channels of the channelling arrangement can be used for the transmission.
- No switching equipment or algorithm is necessary for protection operation.
- In case of failure of one Virtual Container, the bandwidth is reduced (to the same level as in the prior art) but the traffic is not completely lost.
- A dynamic modification of the pipe dimension without any traffic

loss is possible.

There have thus been shown and described a novel method and a novel apparatus which fulfill all the objects and advantages sought therefor. Many changes, modifications, variations and other uses and applications of the subject invention will, however, become apparent to those skilled in the art after
5 considering the specification and the accompanying drawings which disclose preferred embodiments thereof. All such changes, modifications, variations and other uses and applications which do not depart from the spirit and scope of the invention are deemed to be covered by the invention which is limited only by the
10 claims which follow.

Claims

1. Method for transmitting/receiving data packet frames in a multi-channel wireless transmission system, the method comprising the steps of receiving a plurality of data packets (A, B, C, ...) to be transmitted; and providing a number (n and p) of radio channels (VC-X#1, VC-X#2, ...) for performing the transmission, the radio channels including one or more working channels (n) and one or more protection channels (p), characterized by the steps of assigning the entire transport of each data packet (A, B, C, ...) to one radio channel (VC-X#1, VC-X#2, ...) and, in absence of failures, performing the transmission by using all the available working and protection channels.
2. Method according to claim 1, characterized by the step of, in case a radio channel becomes affected by a failure in at least one direction, disabling the failure-affected channel (VC-X#3lr) in the opposite direction and assigning the entire transport of each of the further single data packets (A, B, C, ...) to corresponding single radio channels (VC-X#1, VC#X-2, ...) of the remaining unfailed radio channels.
3. Method according to claim 2, characterized in that the step of disabling the failure-affected channel comprises the steps of: detecting that a channel has become affected by a failure; communicating (443r), through a first communication channel (CC1), the channel failure to a corresponding path source block (463r); transferring the failure information to the corresponding path sink block (483I); and finally forwarding the failure information to the path source block (423I) of the transmitting side through a second communication channel (CC2).
4. Method according to any of the preceding claims, characterized by the step, at the transmitting side, of attaching a sequence label/number to every data packet (A, B, C, ...) that is transmitted and, at the receiving side, of reordering the data packets according to the proper sequence label/number.
5. Apparatus for transmitting/receiving data packet frames in a multi-channel wireless transmission system comprising a number (n and p) of radio

channels (VC-X#1, VC-X#2, ...) for performing the transmission, the radio channels including at least one working channel and at least one protection channel, the apparatus (NE#0, NE#1) comprising interfaces for receiving a plurality of data packets (A, B, C, ...) to be radio transmitted and interfaces for
5 outputting packets that have been received from a remote radio apparatus; a number (n and p) of transmitters (421l-424l; 461r-464r); and a corresponding number (n and p) of receivers (441r-444r; 481l-484l), characterized by further comprising a dispatcher (42l; 42r) for assigning each packet (A, B, C, ...) to a transmitter so that the entire transport of each data packet (A, B, C, ...) is made
10 by one radio channel (VC-X#1, VC-X#2, ...) and in that, in absence of failures, the transmission is performed by using all the available working and protection channels.

6. Apparatus according to claim 5, characterized in that it further comprises a communication channel (CC1; CC2) from reporting channel failure
15 information between a transmitter (421l-424l; 461r-464r) and a receiver (441r-444r; 481l-484l).

7. Apparatus according to claim 1 or 2, characterized in that means
are provided in the transmitting side for attaching a sequence label/number to every data packet (A, B, C, ...) that is transmitted and, in the receiving side, for
20 reordering the data packets according to the proper sequence label/number.

Abstract

Packet switching for packet data transmission systems in a multi-channel radio arrangement

Described is a packet switching mechanism for packet data transmission systems in a multi-channel radio arrangement. The method comprises the steps of receiving a plurality of data packets (A, B, C, ...) to be transmitted; and providing a number ($n+p$) of radio channels (VC-X#1, VC#X-2, ...) for performing the transmission. The method is characterized by the steps of assigning the entire transport of each data packet (A, B, C, ...) to one radio channel (VC-X#1, VC#X-2, ...) and, in absence of failures, by performing the transmission by using all the available working and protection channels.

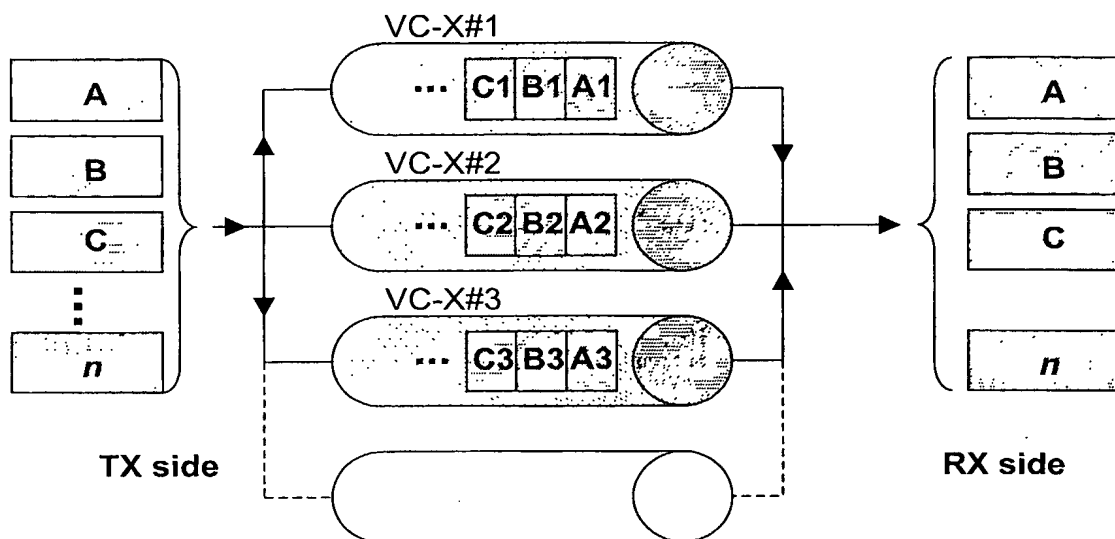


Fig. 1 (prior-art)

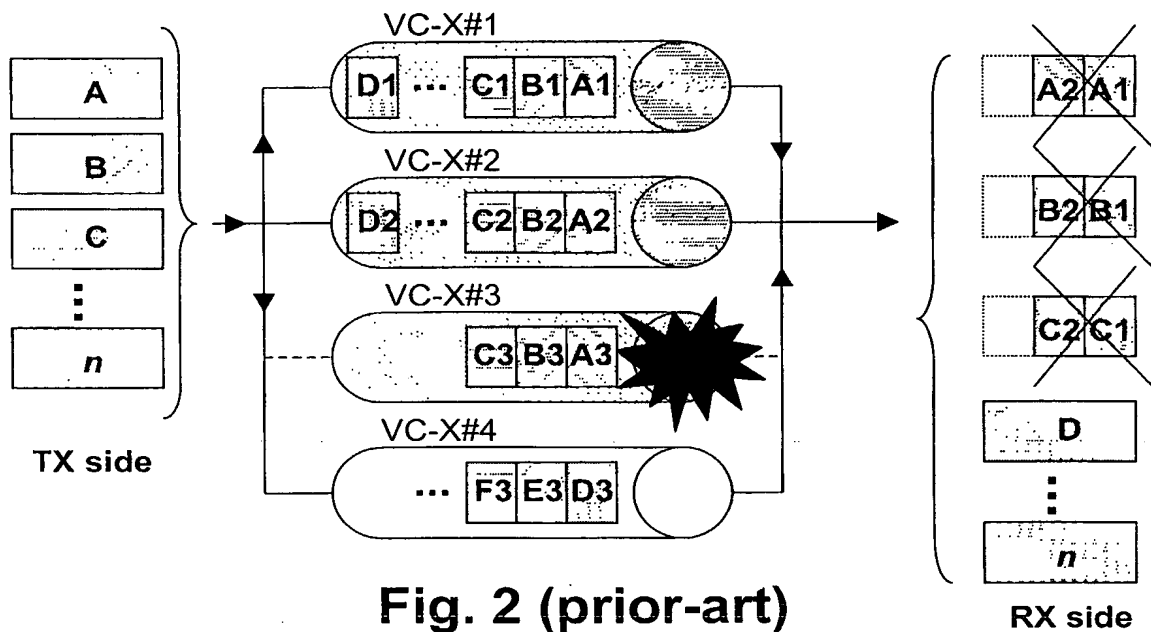
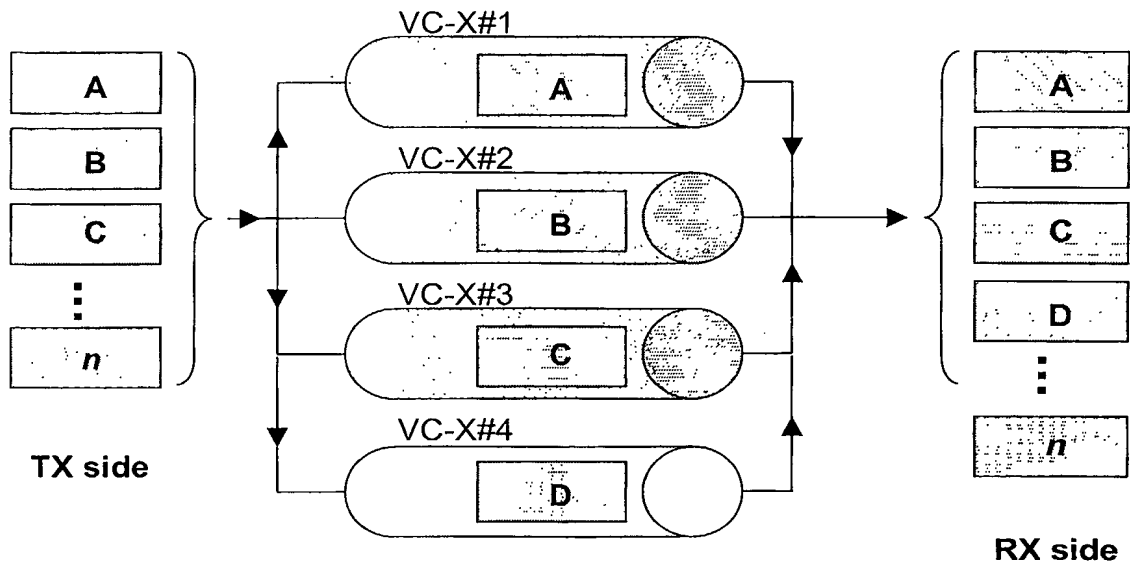
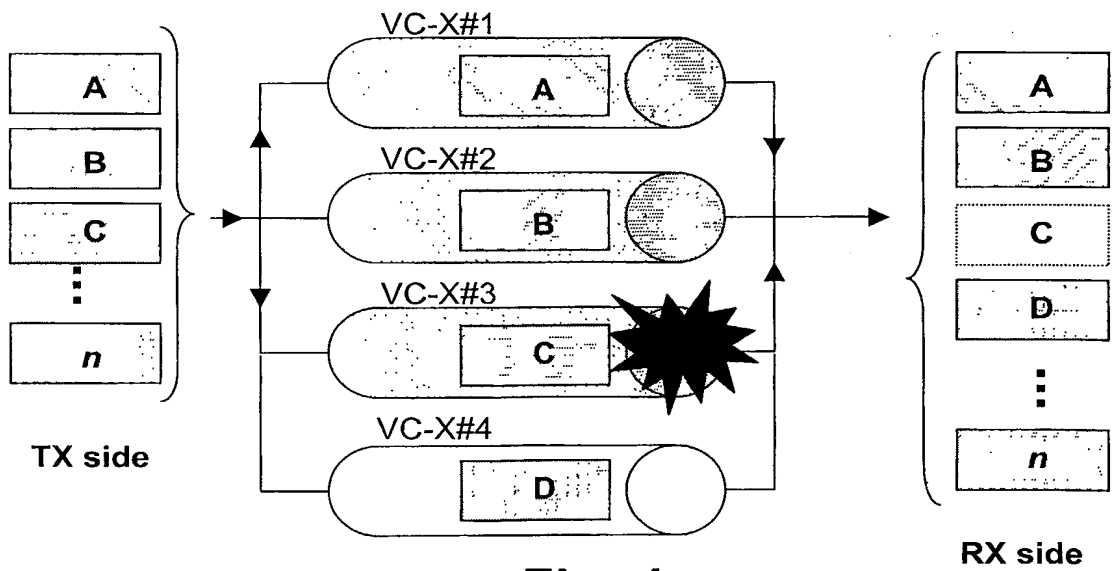


Fig. 2 (prior-art)

**Fig. 3****Fig. 4**




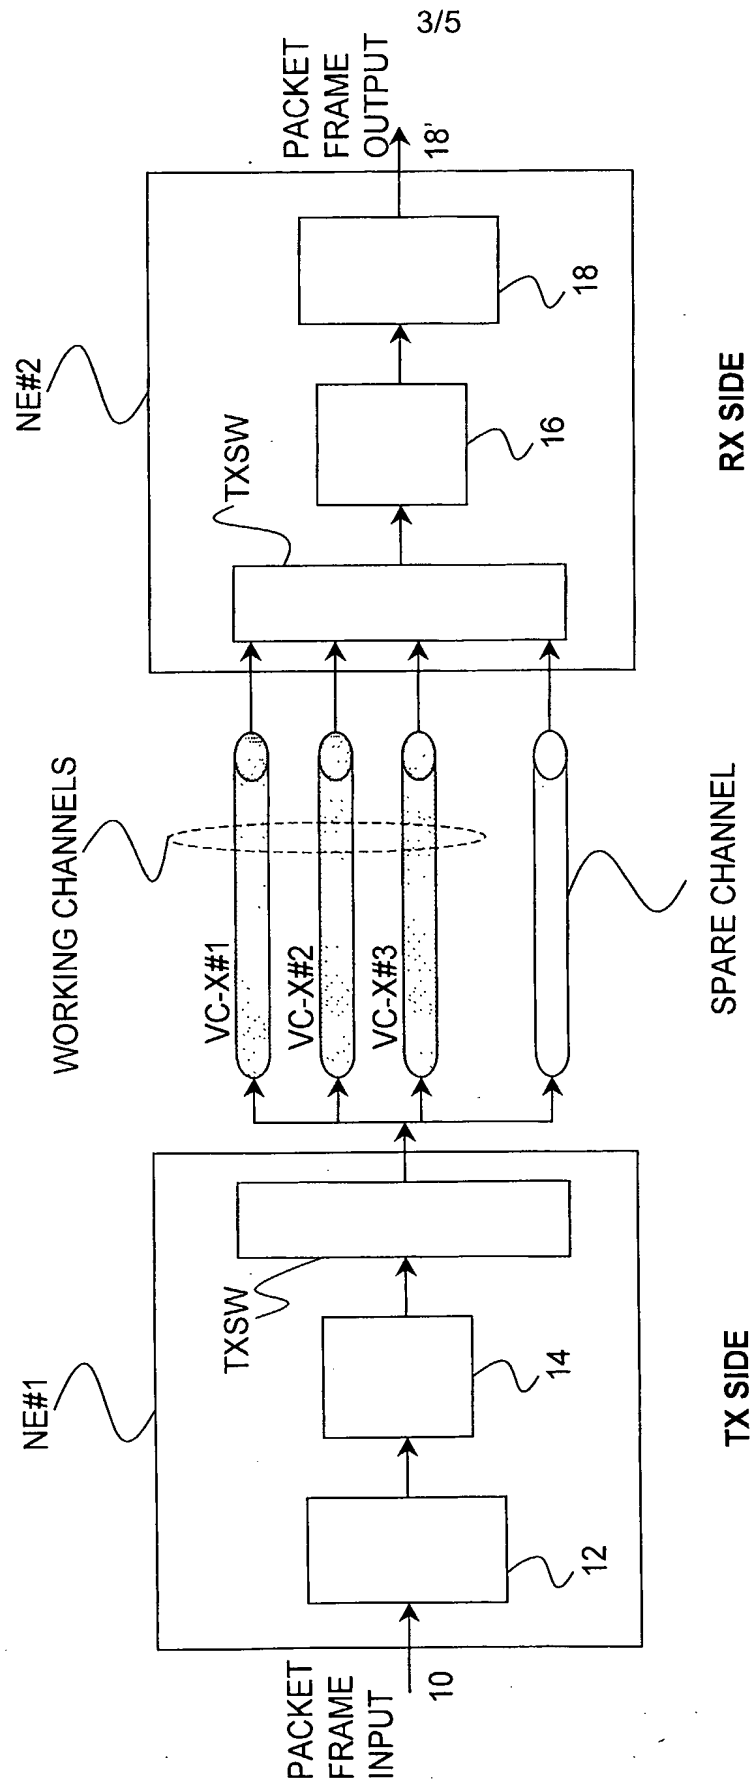


Fig. 5

**Fig. 6****Fig. 7**

**Fig. 8**

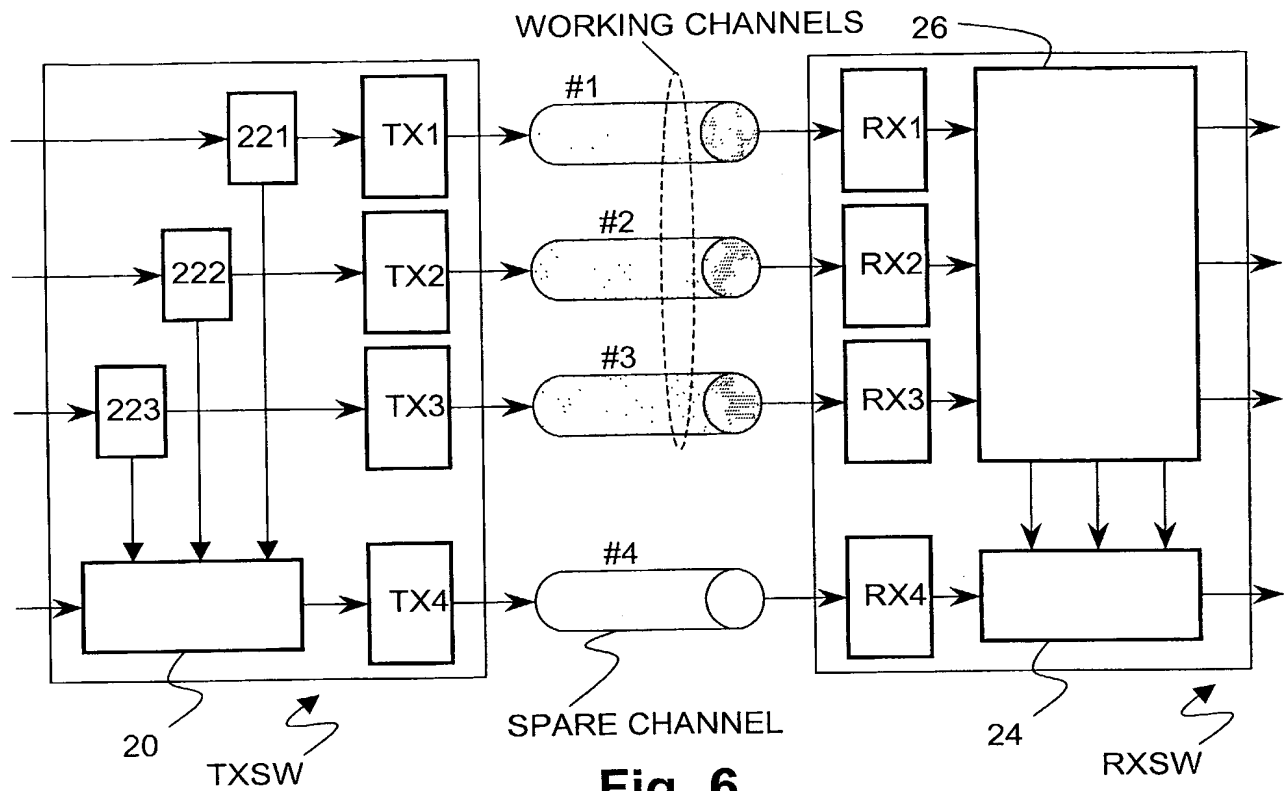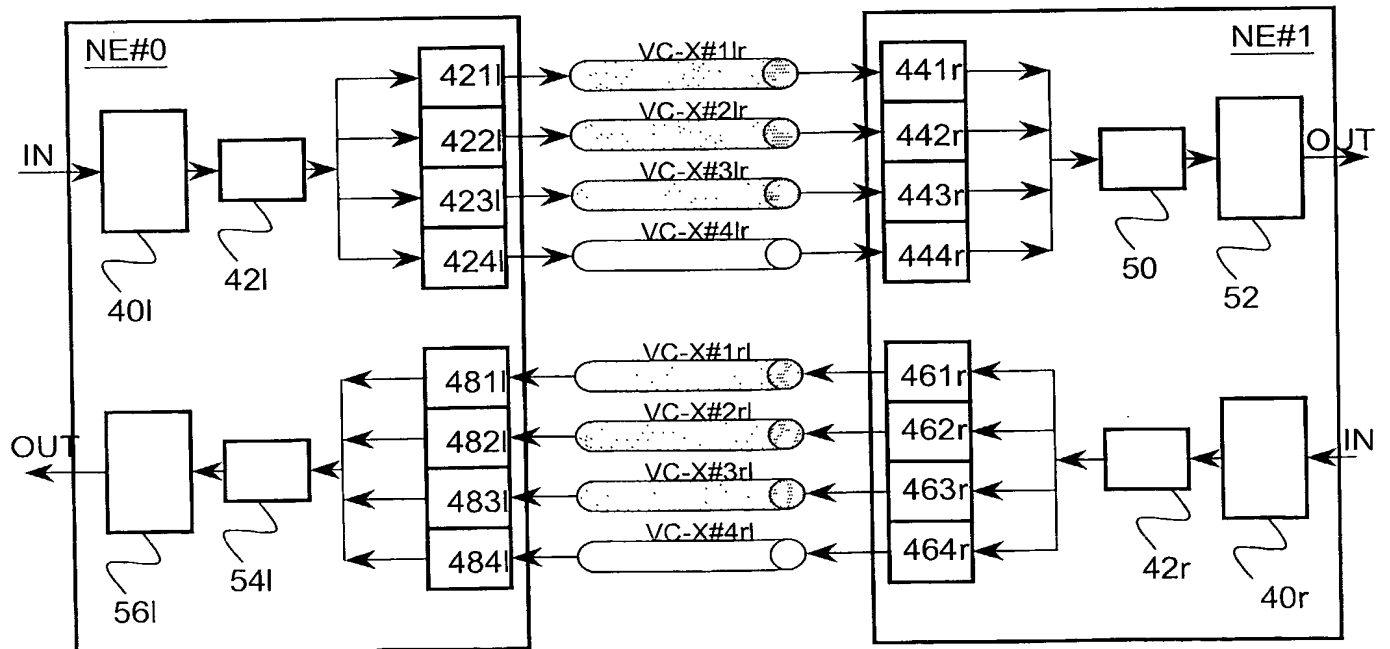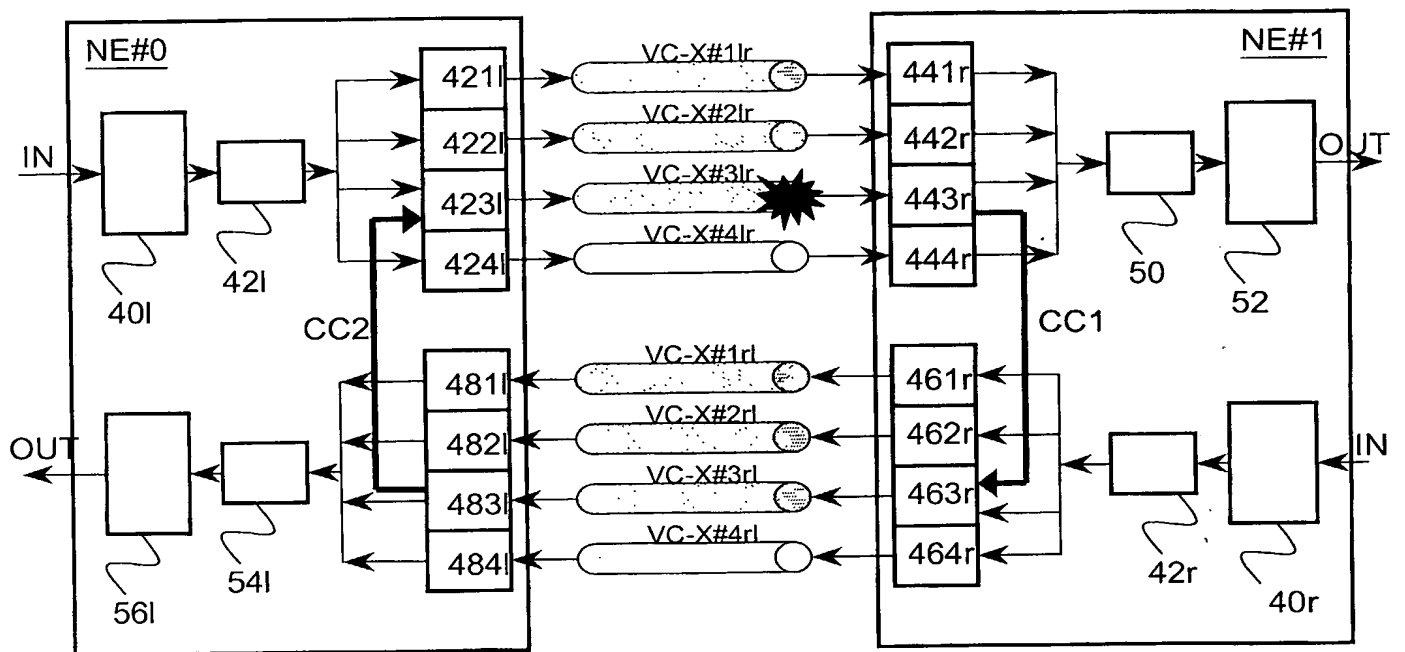